

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 36 TOWNSHIP 17 RANGE 2

DATE: 3-3-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-28-01

IN. S.P.C. E ZONE NAD '83

NAME: 17023608

N: 512941.8160(m)

E: 50055.6549(m)

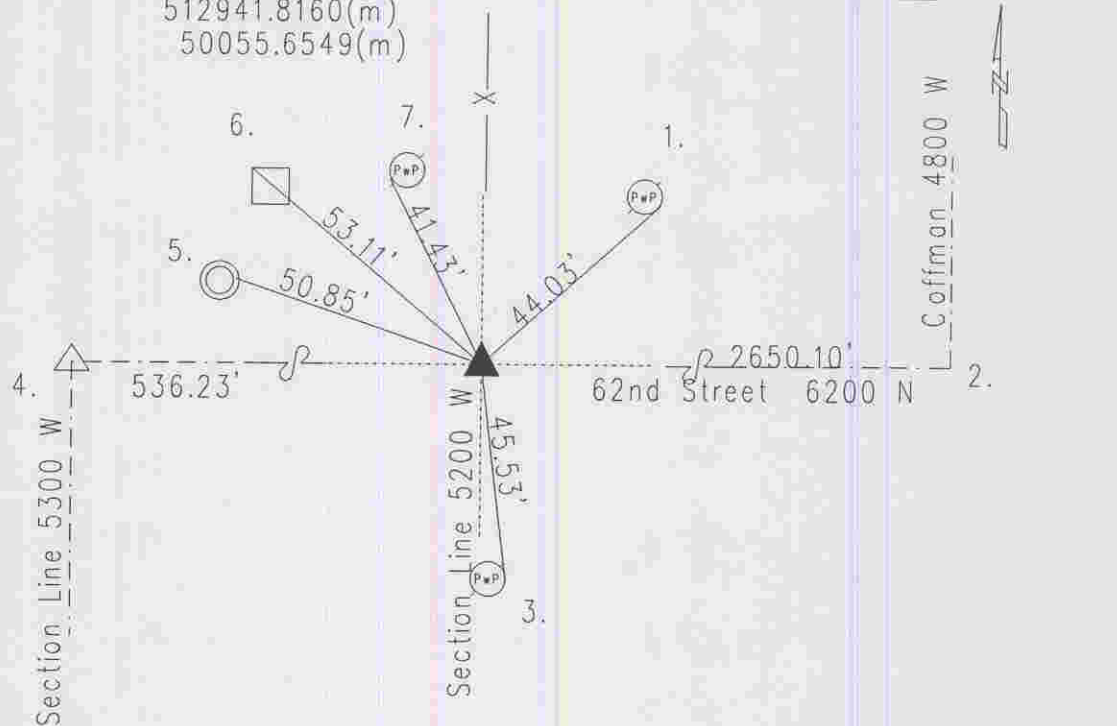

Original post set 1821 by Laughlin with witness: 7" sugar S 83 W 19 links; 7" beech N 62 E 12 links per Marion County Atlas pg. 4. Hosbrook 2-14 & 15-1853 called no stone or witness per Pike Township Legal Survey Book pg. 45. Schmidt 10-6-61 called 1" square brass plug in concrete. MCSO 7-30-63 called the same. Miller 5-27-75 called PK nail. Gries 3-16-88 called PK nail w/washer. Excavated by Wilcoxon 8-4-96 and square brass plug in concrete found 10" down. Harrison set. Re-tied 7-28-01 by Whiteside. Re-tied 3-3-06 by Wilcoxon. 17023608

REF.	DISTANCE	DESCRIPTION
1.	44.03'	PK nail F PwP#217-296 A 8"up
2.	2650.10'	Due E to Coffman Road 4800 W
3.	45.53'	PK nail F PwP#10-295B 8"up
4.	536.23'	Due W to NF corner of 1-16-2 : Harrison
5.	50.85'	Cut 'x' E-edge of telephone rim
6.	53.11'	NW corner of telephone pad
7.	41.43'	PK nail W PwP#10-295B 8"up